




PRODUCT INFO

Cross clamps KKG of precision-cast stainless steel have a split clamping point and a clamping point without slit.

The bores of the clamping points are offset in the plane and arranged at an angle of 90°. They receive typically available rods and tubes with round or square cross-sections via the additionally incorporated square bores.

At the split clamping point, hex socket cap screws reduce the bore cross-section for clamping. At the clamping point without slit a hex socket cap screw provides the radial clamping force.

RoHS-compliant product

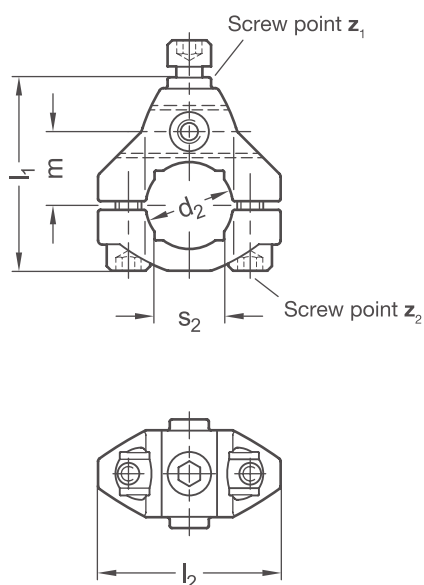

Clamping point 1	Clamping point 2								
Bore d₁	Bore d₂	k	l₁	l₂	m	Square s₁	Square s₂	Hex socket cap screw z₁	Hex socket cap screw z₂
B12	B12	20	35,5	42	14	10	10	M6-8	M6-12
B20	B20	20	44,5	42	17	10	16	M6-10	M6-18

Screw points z
2 With 3 hex socket cap screws stainless steel A2 ISO 4762

Surface / material o
ED Stainless steel, blasted, matt

ORDER KEY

KKG - d₁ - d₂ - z - o

Cross clamp	
Clamping point 1	
Clamping point 2	
Screw points	
Surface / material	

ON REQUEST

– Clamping points with different diameters d₁, d₂, s₁ and s₂ or special diameter