



**PRODUCT INFO**

**Clamping kits HM** of type K are comprised of silver powder-coated zinc die-cast adjustable hand levers containing installed screw inserts with a rolled thread. The screw inserts and the centering, spacing, and threaded bushes are made of turned stainless steel.


The screw inserts are connected to the handle by groove tothing such that they can be disengaged. Lifting the lever releases the engagement, and the adjustable hand lever can be swiveled to a favorable position.

Clamping kits HM of type K are delivered with a stainless steel hex socket cap screw DIN 912 instead of the tool-free adjustable hand lever.

Clamping kits HM are specially designed as accessories for use with swivel clamp mountings. They can be used to combine swivel clamp mountings with identical k dimensions to create joint clamp mountings.

The tables for the respective swivel clamp mountings contain the appropriate clamping kits HM for each thread dimension.

**RoHS-compliant product**

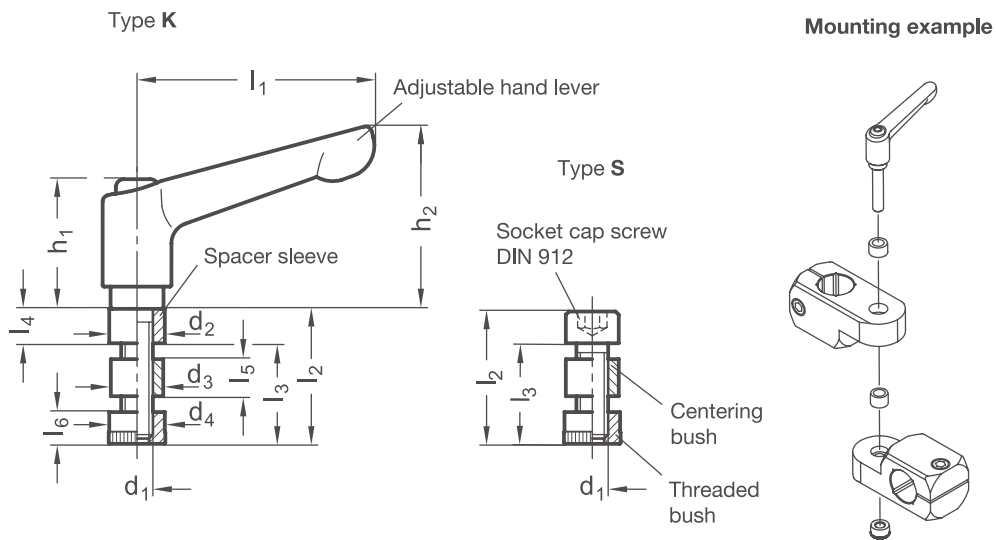


d <sub>1</sub>	l <sub>2</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	l <sub>1</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>	h <sub>1</sub>	h <sub>2</sub>	Swivel clamp mounting k dimension
M 4	16	7,5	6,9	7,5	22	11,5	4,5	4	4	18,5	23	16
M 5	20	9	8,4	9	30	14	6	5	5	24,5	30,5	20
M 6	25	10,5	9,9	10,5	45	18,5	6,5	7	6	24,5	35	25
M 6	30	10,5	9,9	10,5	45	23,5	6,5	7	6	24,5	35	30

Typ  
t

K	Adjustable hand lever zinc die-cast / stainless steel (lever in silver texture powder-coated, screw, spacer sleeve, centering bush and threaded bush A1)
S	Hex socket cap screw stainless steel (DIN 912-A2-70, centering bush and threaded bush A1)

ORDER KEY

HM - d<sub>1</sub> - l<sub>2</sub> - t

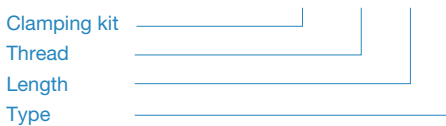

ON REQUEST

– Adjustable hand lever surface  
in other RAL colors

2D  
2C  
2B  
2A  
1D  
1C  
1B  
1A